



## INLINE® USB 3.2 C FEMALE / FEMALE WITH FLANGE CABLE, BLACK, 0.2M

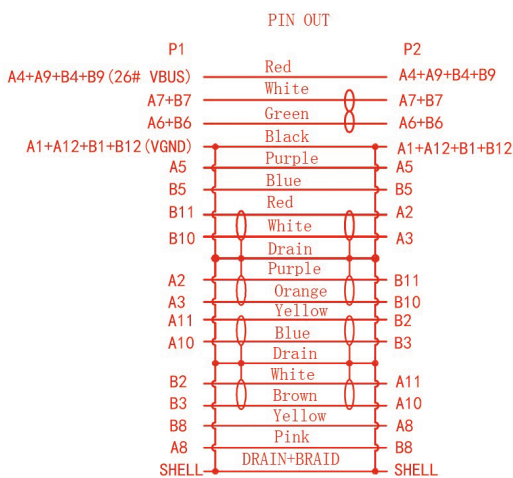


InLine® USB 3.2 C female to female with flange cable

- USB C female plug to USB C installation female plug
- Opening for USB connector approx. 9x3.5mm, hole spacing: 25mm
- Thread length of the attached screws #4-40 approx. 15mm
- max. 5 Gb/s (USB 3.2 Gen.1)
- Compatible to Power Delivery 3.0

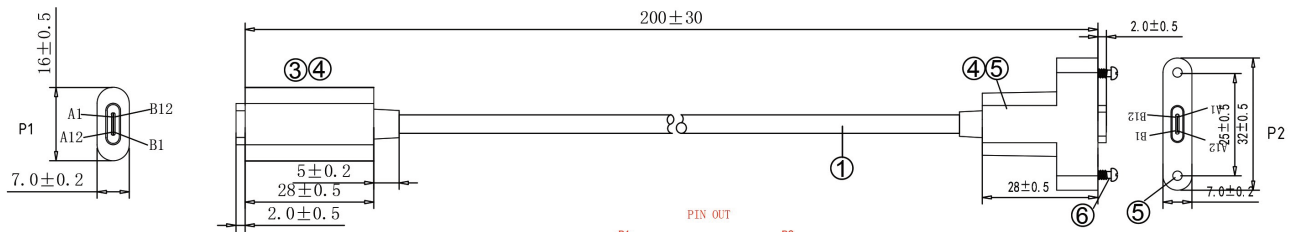

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y
④	THUMB SCREW	#4-40*15 nickel-plated	2
⑤	THUMB SCREW	NUT-NICKEL PLATED(#4-40)	2
①	MOLDED	45P BLACK PVC	2
③	MOLDED	LDPE	2
②	USB A TYPE	USB 3.1 C /F Solder Type, Blue PBT Insulation, The Pin Gold Plated 3U", the shell nickel-plated With PCB board	2
①	CABLE	USB3.1 CABLE (1P*34AWG+D+AL+MY)*4C+1P*32AWG+4C*32AWG+2C*26AWG+F+MY+AB +Jacket PVC Black OD:4.2±0.2MM	1



EAN: 4043718266579  
ART.-NR.: 33441H