

# INLINE® KVM SWITCH, 2-WAY, HDMI

## 4K60Hz, dual monitor



- **Efficient control of two PCs with dual monitor setup:** Operate two computers simultaneously via two HDMI monitors and shared USB peripherals.
- **High image quality with 4K60Hz support:** Enjoy crystal-clear images in up to 4K@60Hz with full colour depth and HDR functionality.
- **Flexible control options for professional applications:** Switching via hotkey, front button, IR remote control or RS-232 – ideal for individual working environments.
- **Maximum compatibility thanks to platform-independent technology:** Works without drivers with Windows, macOS and Linux – ideal for mixed IT infrastructures.
- **Reliable operation thanks to sturdy metal housing:** Robust construction and ESD protection ensure safe and long-lasting use in professional environments.

The InLine® KVM Switch, 2-port, HDMI, 4K60Hz, Dual Monitor, has been developed for professional users who want to efficiently operate two computers via a shared set of peripherals. With two HDMI outputs per PC, you can operate two monitors simultaneously – ideal for multitasking and parallel work.

The device supports high-resolution image signals up to 4K@60Hz in full colour depth (4:4:4) including HDR, Dolby Vision and other modern video formats. Switching is convenient via hotkey, IR remote control, front button or RS-232 interface – just as you need it.

The integrated USB interface allows simultaneous access to keyboard, mouse, storage media or other USB 3.2 Gen.1 devices. Thanks to its driverless plug-and-play functionality, the KVM switch is ready for immediate use – across platforms under Windows, macOS and Linux.

Thanks to its high-quality metal housing, ESD protection and well-designed accessories, the device is perfect for control rooms, technical workstations or professional multi-system environments.

- HDMI inputs: 4 × HDMI (2 per PC, A/B)
- HDMI outputs: 2 × HDMI (display A and B)
- USB ports: 2 × USB host (USB-B), 4 × USB 3.2 Gen.1 (USB-A)
- Audio output: 3.5 mm stereo jack (PCM 2.0CH)
- RS-232: 3-pin terminal connection
- IR EXT: 3.5 mm stereo jack (38 kHz)
- Resolution: up to 4K@60Hz, 2K@144Hz
- Colour depth: 8 / 10 / 12 bits
- Colour spaces: RGB, YCbCr 4:4:4, 4:2:2, 4:2:0
- HDR support: HDR, HDR10, HDR10+, Dolby Vision, HLG
- HDMI version: HDMI 2.0
- HDCP compatibility: HDCP 2.3
- Audio formats HDMI IN/OUT: LPCM, Dolby Digital/Plus/EX, Dolby TrueHD, Dolby Atmos, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X, DSD
- Latency: no video or audio delay
- CEC support: yes
- ESD protection: ±8 kV air / ±4 kV contact

- Housing: metal housing, black
- Dimensions: 220 × 100 × 30 mm
- Weight: 626 g
- Operating temperature: 0–40 °C
- Storage temperature: –20–60 °C
- Humidity: 20–90% (non-condensing)

#### Recommended HDMI cable lengths:

- up to 5 m: 4K@60Hz (Premium High Speed HDMI)
- up to 10 m: 1080p (standard HDMI cable)



#### External power supply (power adapter):

- Type: External plug-in power adapter with lock
- Input voltage: 100–240 V AC, 50/60 Hz
- Output voltage: 12.0 V DC
- Output current: max. 1.0 A
- Output power: 12.0 W
- Average efficiency in operation: 85.23%
- Efficiency at low load (10%): 78.53%
- Power consumption at zero load: 0.09 W

#### Scope of delivery:

- 1× InLine® KVM switch, 2-port, HDMI, 4K60Hz, dual monitor
- 1× IR remote control
- 1× IR receiver cable (1.5 m, 38 kHz)
- 2× HDMI cables (1.5 m each)
- 2× USB cables (USB 3.2 Gen.1, USB-A to USB-B, 1.8 m)
- 1× 12 V/1 A power supply with lock
- 1× 3-pin terminal connection plug
- 2× mounting brackets
- 4× screws (KM3×4)
- 1× user manual in German/English

Item No.	Number of CPU	EAN
57885F	2	4043718344291

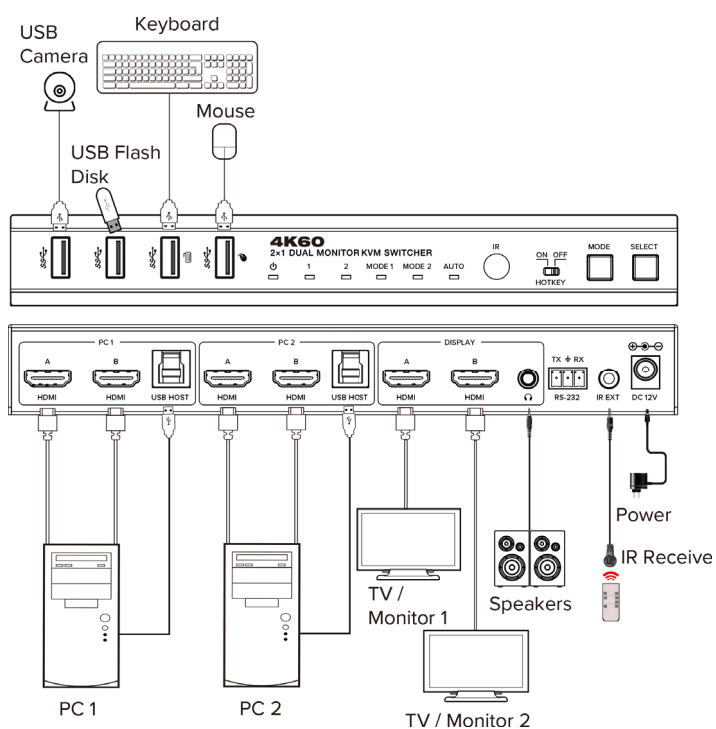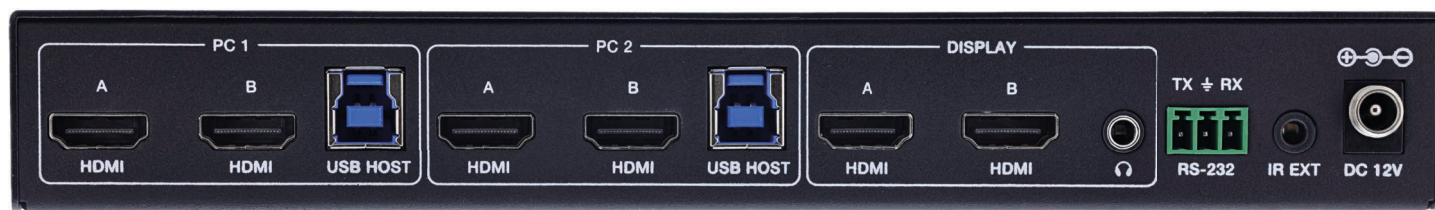

Technical Data	
Article height:	3.0 cm
Article length:	22 cm
Article width:	10 cm
Audio outputs per console:	3.5mm jack x1
Audio per CPU:	3.5mm jack x1
Complies with HDMI standard:	2.0
Design:	Desktop
Front panel buttons:	Yes
Incl. KVM cableset:	Yes
Max. resolution:	3840x2160 / 60Hz
Number of CPU:	2
Number of consoles:	1
Peripheral outputs per console:	USB-A female x2
Screen connectors per console:	2
Type 1:	KVM switch
Type 2:	2-fold HDMI KVM
Type of packaging:	InLine® carton without Euro perforation
USB peripherals:	Yes
USB specification:	USB 3.2 Gen.1
Video inputs per CPU:	HDMI x2
Video outputs per console:	HDMI x2

If you have any further questions, please contact [marketing@inline-info.com](mailto:marketing@inline-info.com)

[www.inline-info.com/en/](http://www.inline-info.com/en/)

#### Disclaimer

InLine® is a brand of INTOS ELECTRONIC AG | Siemensstraße 11 | D-35394 Gießen

#### Documentation © 2025 INTOS ELECTRONIC AG

All rights reserved. No part of this document may be reproduced in any form or by any means, electronic, mechanical or chemical, without the prior written permission of the publisher. It is possible that this document may still contain typographical faults or misprints.

However, the information in this document will be checked regularly and corrections will be made in the next edition. We accept no liability for errors of a technical or printing nature and their consequences. All trademarks and industrial property rights are acknowledged. Changes in the sense of technical progress can be made without prior notice. Our products, including packaging, are not toys, they may contain small parts and sharp objects.

Please keep away from children.