






## ISDN SPITTER 1->2, INLINE®, 1X RJ45 M TO 2X RJ45 F, (8P8C) WITH 15CM CABLE, WITHOUT RESISTORS

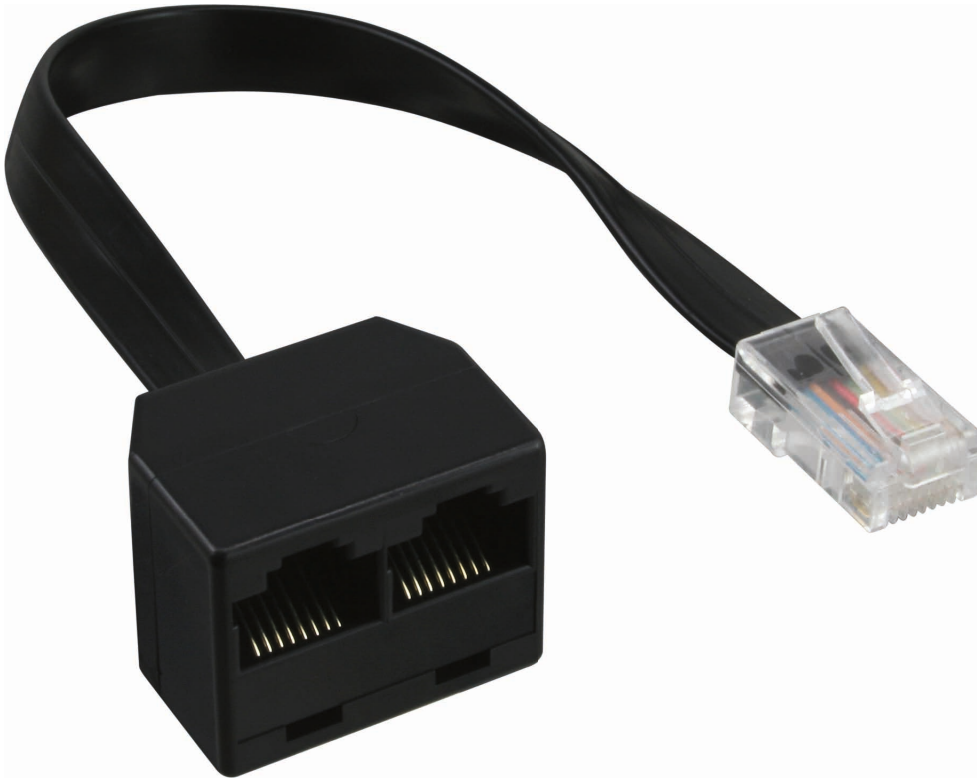

Use this adapter to operate 2 ISDN end devices from one telephone connection.

- 1x RJ45 plug
- 2x RJ45 sockets
- W/o terminal resistor
- 1:1 assignment

⑥	Cable	28AWG 7*0.12(CCS) 8C Flat cable BLACK	8
⑤	RJ45 JACK	8P8C Jack Connector Gold plate 3u"	8
④	RJ45 Plug	PC transparent 8P8C Connector Gold plate 3u"	1
③	Housing	ABS BLACK	2
②	Lock pin slot	HIPS BLACK	1
①	Cover	ABS BLACK	1
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y

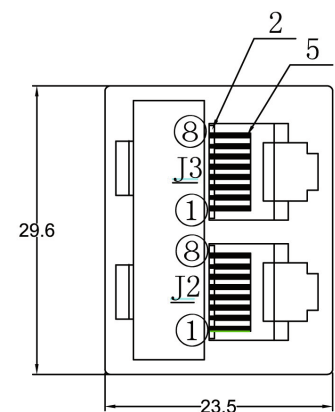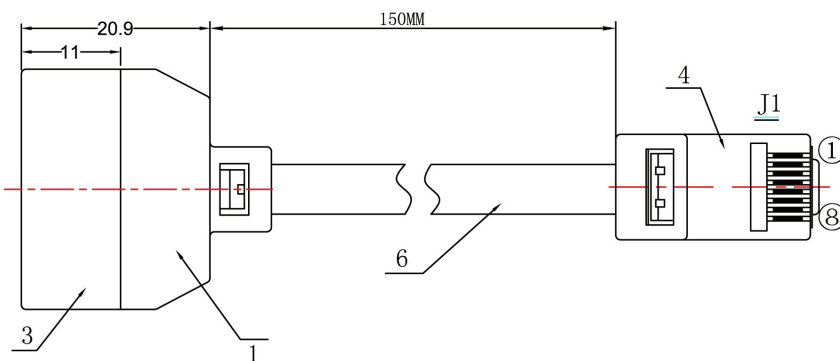

**NOTE:**

- (1). 100% open short & miss wire test;
- (2). RoHS compliant
- (3). Packing: 1PCS/InLine Slip bag+label1, 10PCS/Big PE Bag + label2

**EAN: 4043718039357**  
**ART.-NR.: 69933**